


“Y / Descriptions


• È / Features

v / Applications

Л ~ ã ð / Equivalent Circuit





ã / ð / Pinning



Ł. H Ñ / Marking

	~


Electrical Characteristic Curve

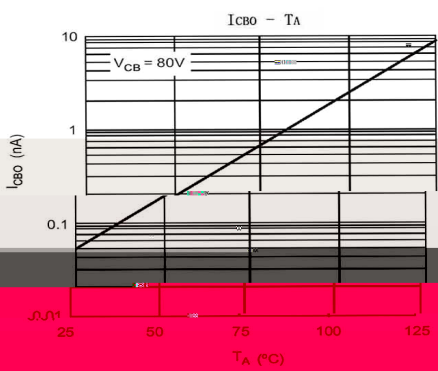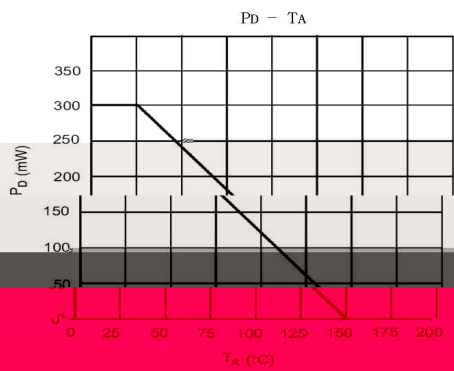


封装 / Package Dimensions

SOT-23


单位; mm

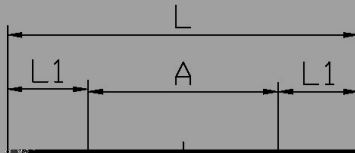

4. 符号 / Marking Instructions

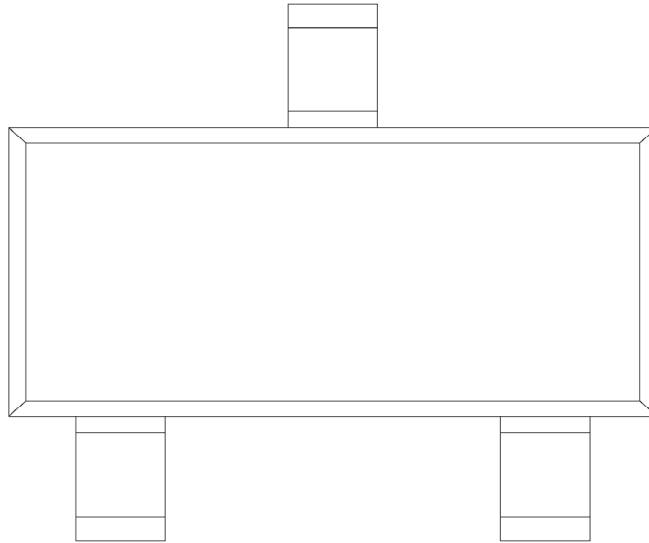

温度曲线图 / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se01uhh,

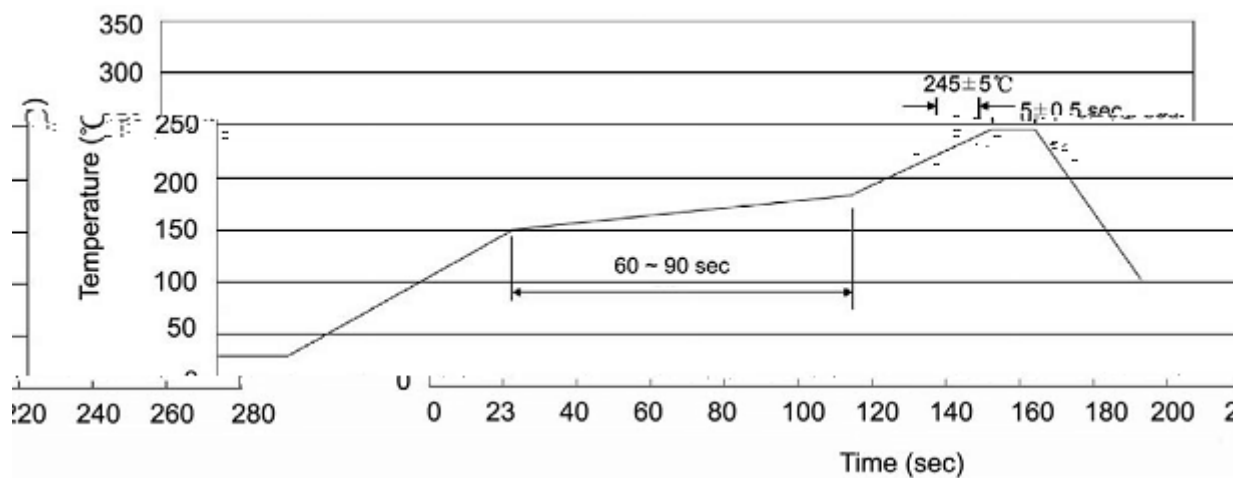

电阻焊 / Resistance to Soldering Heat Test Conditions

包装规格 / Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

注意事项 / Notices