



--	--	--	--	--	--

F

PBSS4320T



!"#\$%&'()*+,-./:;<=>?@A[B CDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`{|}~ DATA SHEET

/ Descriptions

SOT-23 NPN BC56D#EFE#,4AD2C2,64#CD#A#BGH' (I#F&A2,C5#FA5JAK !#

/ Features

L60#? @:;2A,-M#+CK+#5%44 D,! N9#F460%5,!#

/ A

" D 4A&#- %4-62 #20C,5+CDK#ADO# 7 %,CDK##L@P#3A5J'&CK+,CDK##2%- -&Q##CD #20C,5+CDK#5C45%C,2!#



FRE#* SA2 ## FRE#(: 7C,, 4# # FRE#I @6&& 5,64#

/ hFE Classifications & Marking

+9:# ADK	(()T<>)#
UA4JCDK#	NV " #

PBSS4320T

!"#\$%&'()*+,-./:;<=>?@AB CDEFGHIJKLMNOPQRSTUVWXYZ [\] ^ _ ` { | } ~ DATA SHEET

11







/ Package Dimensions

SOT-23

单位：mm

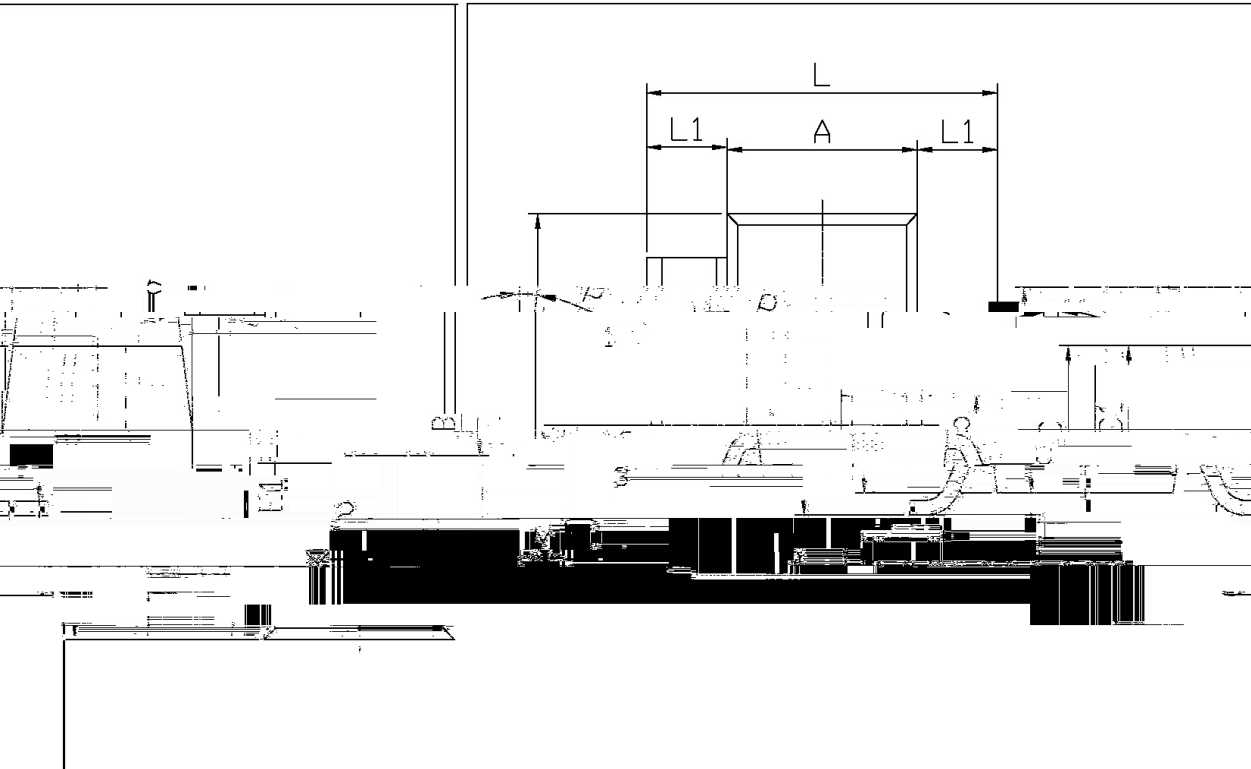



#

/ Marking Instructions

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

#

H

ZG

E6, .#

H # # @67 -ADQ#@60 ##


V" # F460%5,#HQ- #

#

#



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

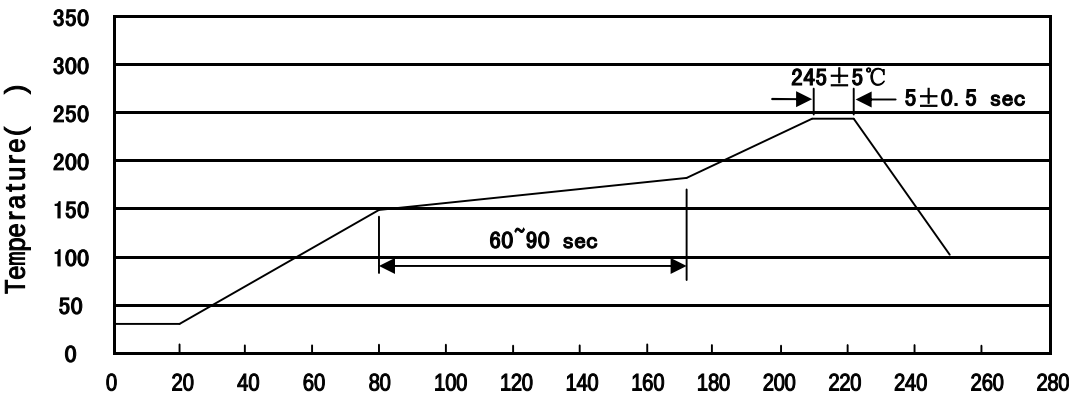

E6, .#
* * >) * c) [) ` ) 2 5 d # # # \* ! F 4 + A , C D K . \* > ) T \* c ) M # H C 7 . [ ) T `) 2 5 ! #
((< > ± > > ±) ! > 2 5 d # # (! F A J # H 7 - ! . (< > ± > M # P % 4 A , C 6 D . > ±) ! > 2 5 ! #
I (*) / 2 5 ! # # # # I ! @ 6 6 C C D K # B - 0 . # (T *) / 2 5 ! #
#

/ Resistance to Soldering Heat Test Conditions

([) ± > # # # *) ± * # 2 5 ! # # # # H 7 - ! . ([) e > ° C # # H C 7 . *) e * # 2 5 #
#

/ Packaging SPEC.

##/## : : L#

FA5JAK #HQ- # 封装形式#	WD,2 包装数量#					P C 7 D 2 C 6 D # 包装尺寸# ; % D C , : 7 7 ' #		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

/ Notices

#