


/ Descriptions

R-6

/ Features**/ Applications**

DC-DC

OR-ing

/ Equivalent Circuit**/ Pinning****/ h_{FE} Classifications & Marking**

/ Absolute Maximum Ratings(Ta=25)

	θ		
≤		≤	

/ Electrical Characteristics(Ta=25)

		℃				

μ
≤


/ Marking Instructions



30T45

30T45

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

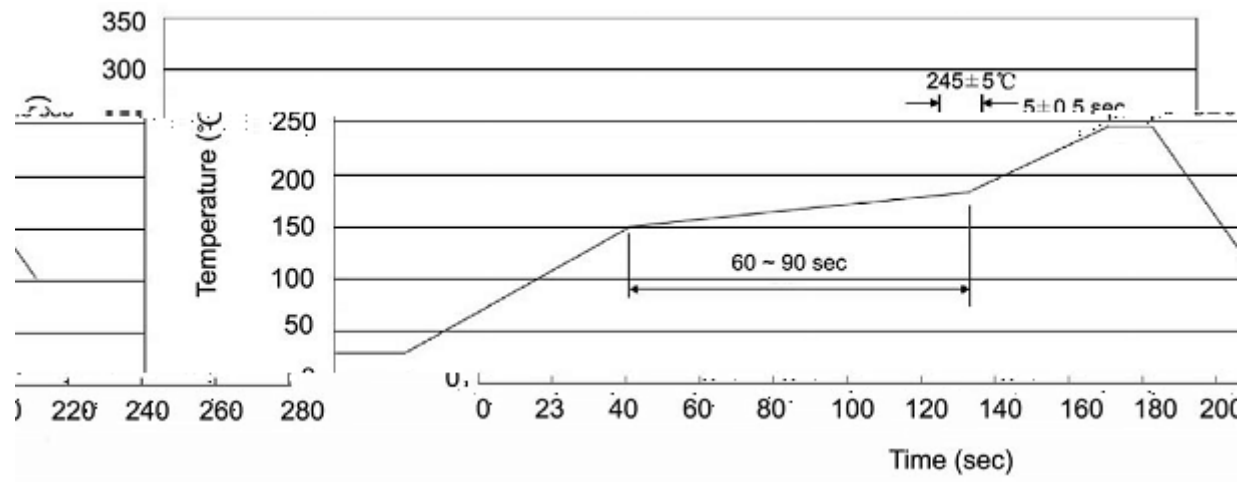

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量			包装尺寸	
	只 袋	只 箱	总重 千克	盒	箱

封装形式	包装数量			包装尺寸			
	只 纸带	只 箱	总重 千克	带宽	编带长	盒	箱

/ Notices