



[illegible]



150V

3.0A

:

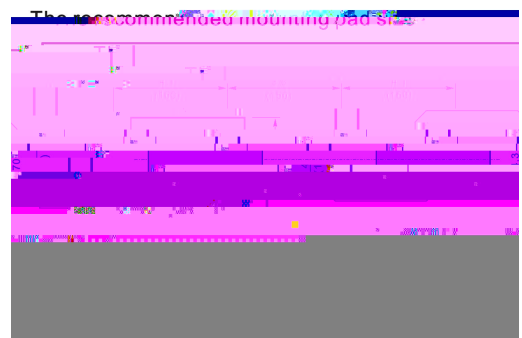



	()		
			℃
			℃
			℃

)
)

			数值	
		℃		
		℃		




Fig.1. Forward Current Derating Curve

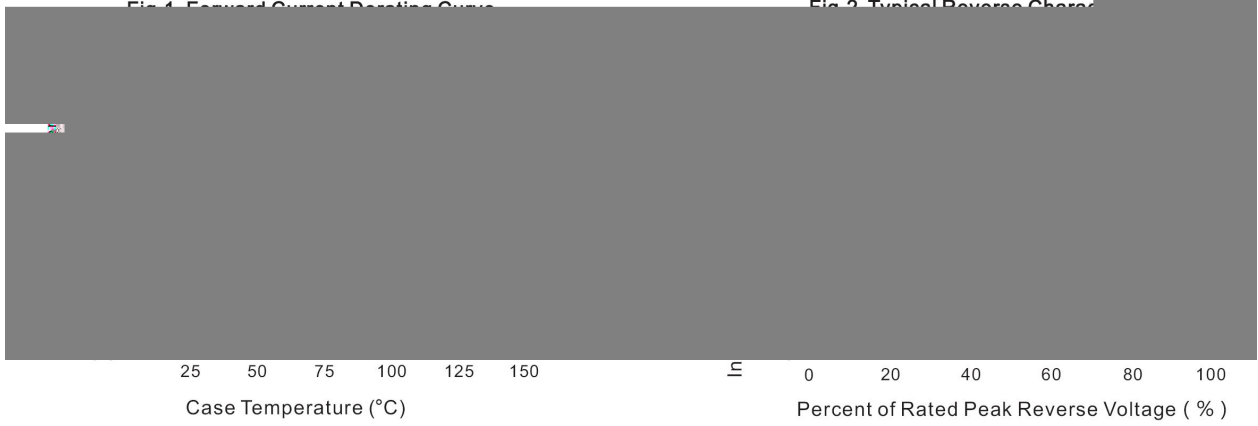


Fig.2. Typical Reverse Characteristic






Fig.3. Typical Forward Characteristic




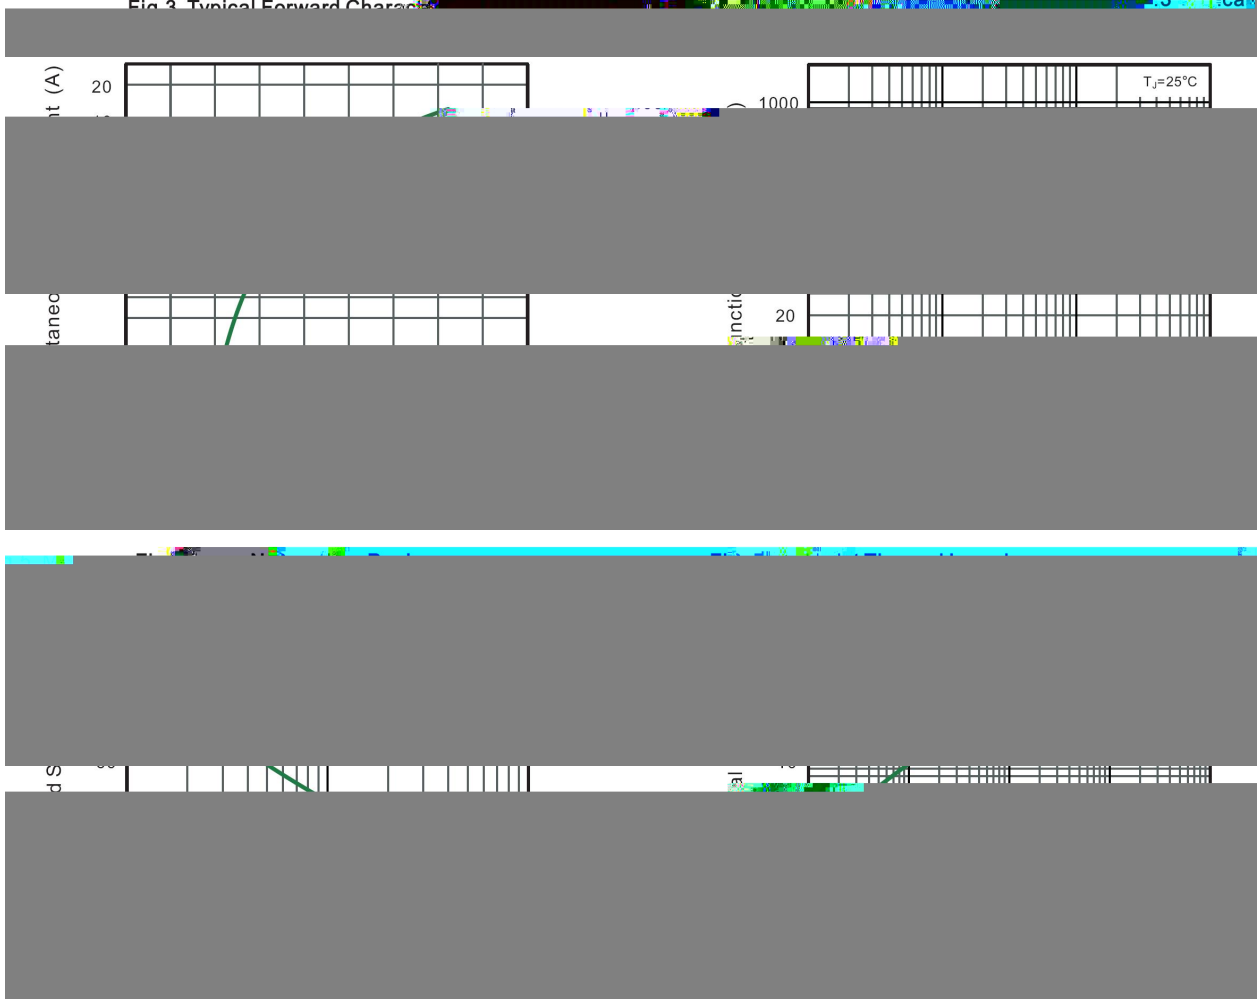


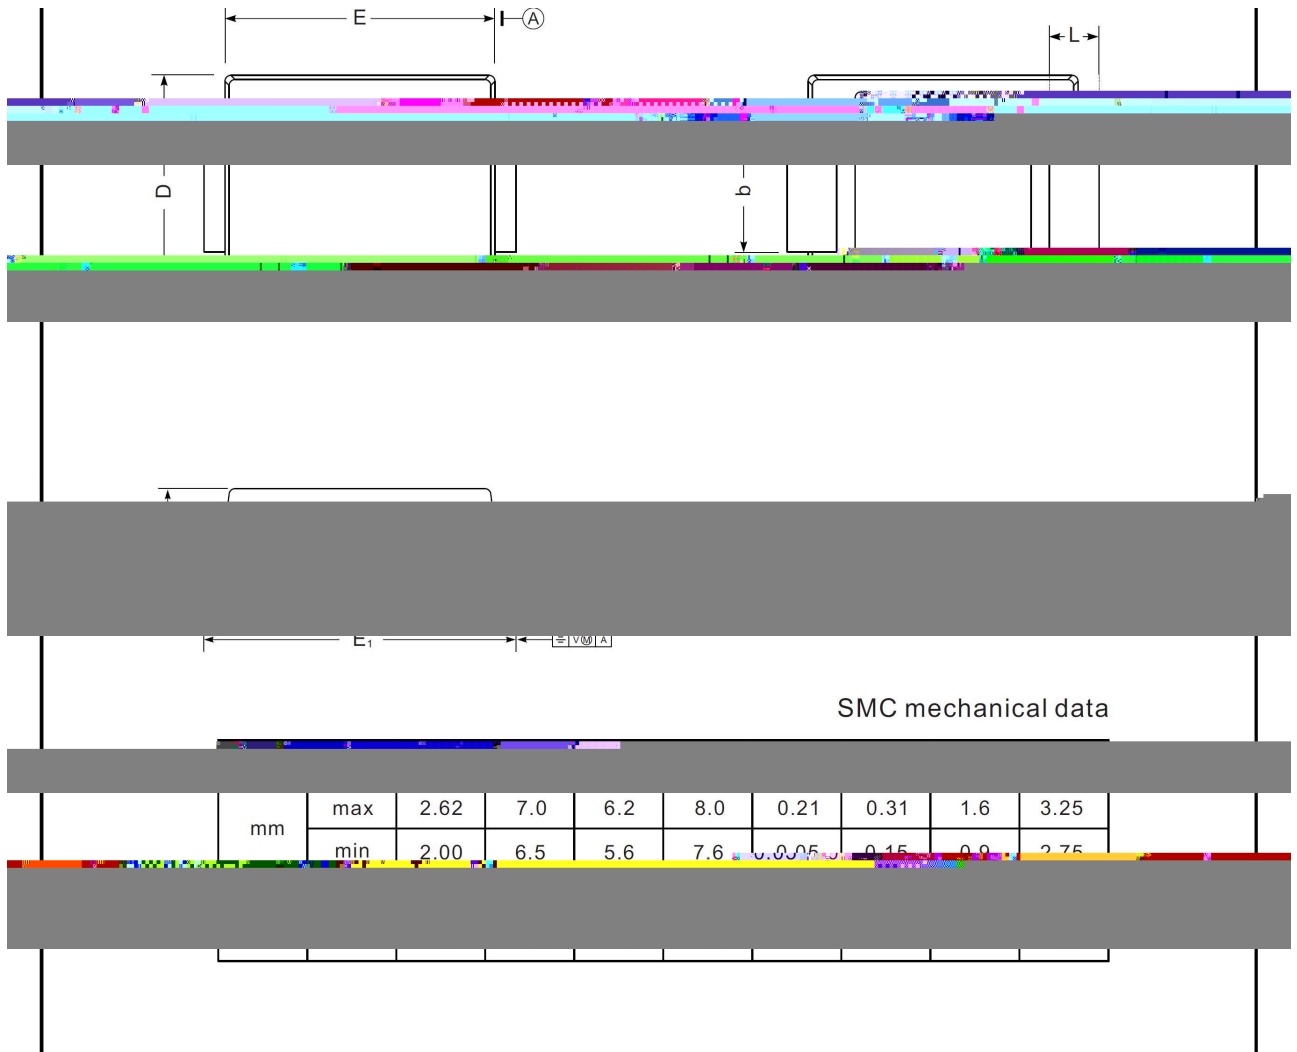

Marking

Type number	Marking code
SS315C	SS315

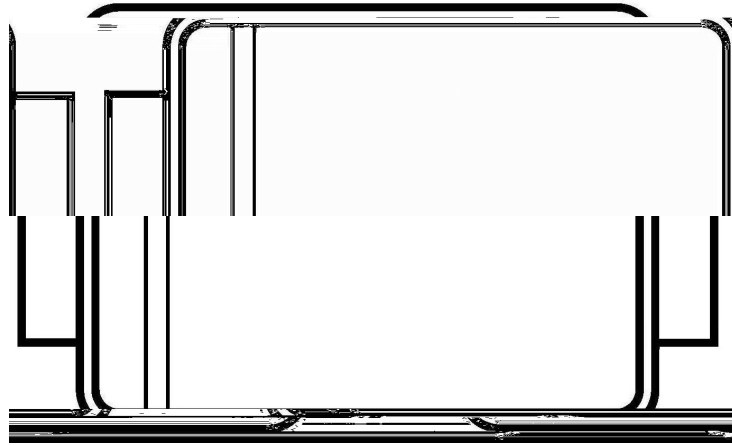

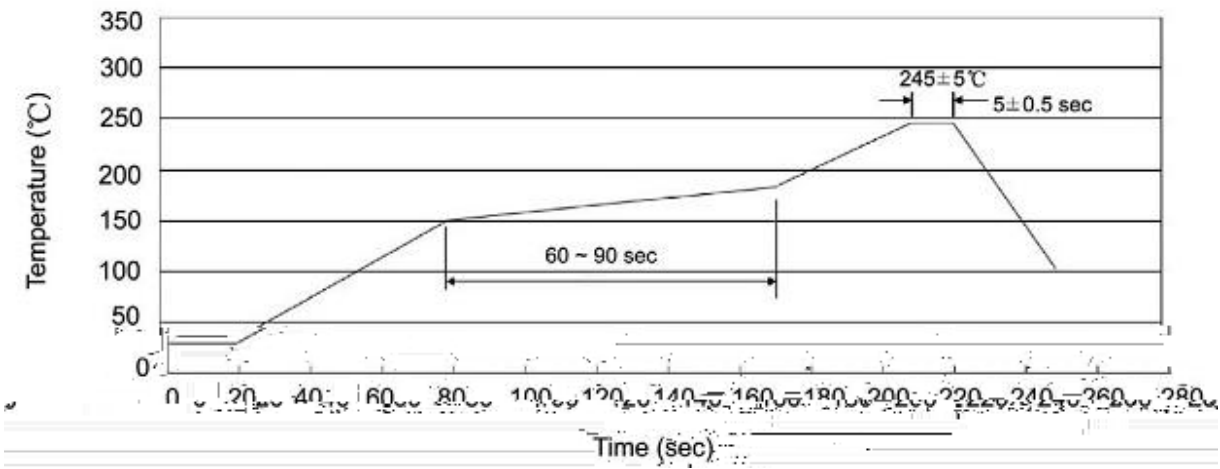

± °C ± °C ± °C

± °C ± °C ± °C

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		