


/ Revised record

[illegible]




/ Descriptions


40V 2.0A
: :

R Features

.



/ Marking




/ Absolute Maximum Ratings(Ta=25)

参数	符号	数值	单位
	()		
			℃
			℃
			℃


)
)

/ Electrical Characteristics(Ta=25)


参数	符号	测试条件	数值	单位
		℃		
		℃		



/ Electrical Characteristic Curve

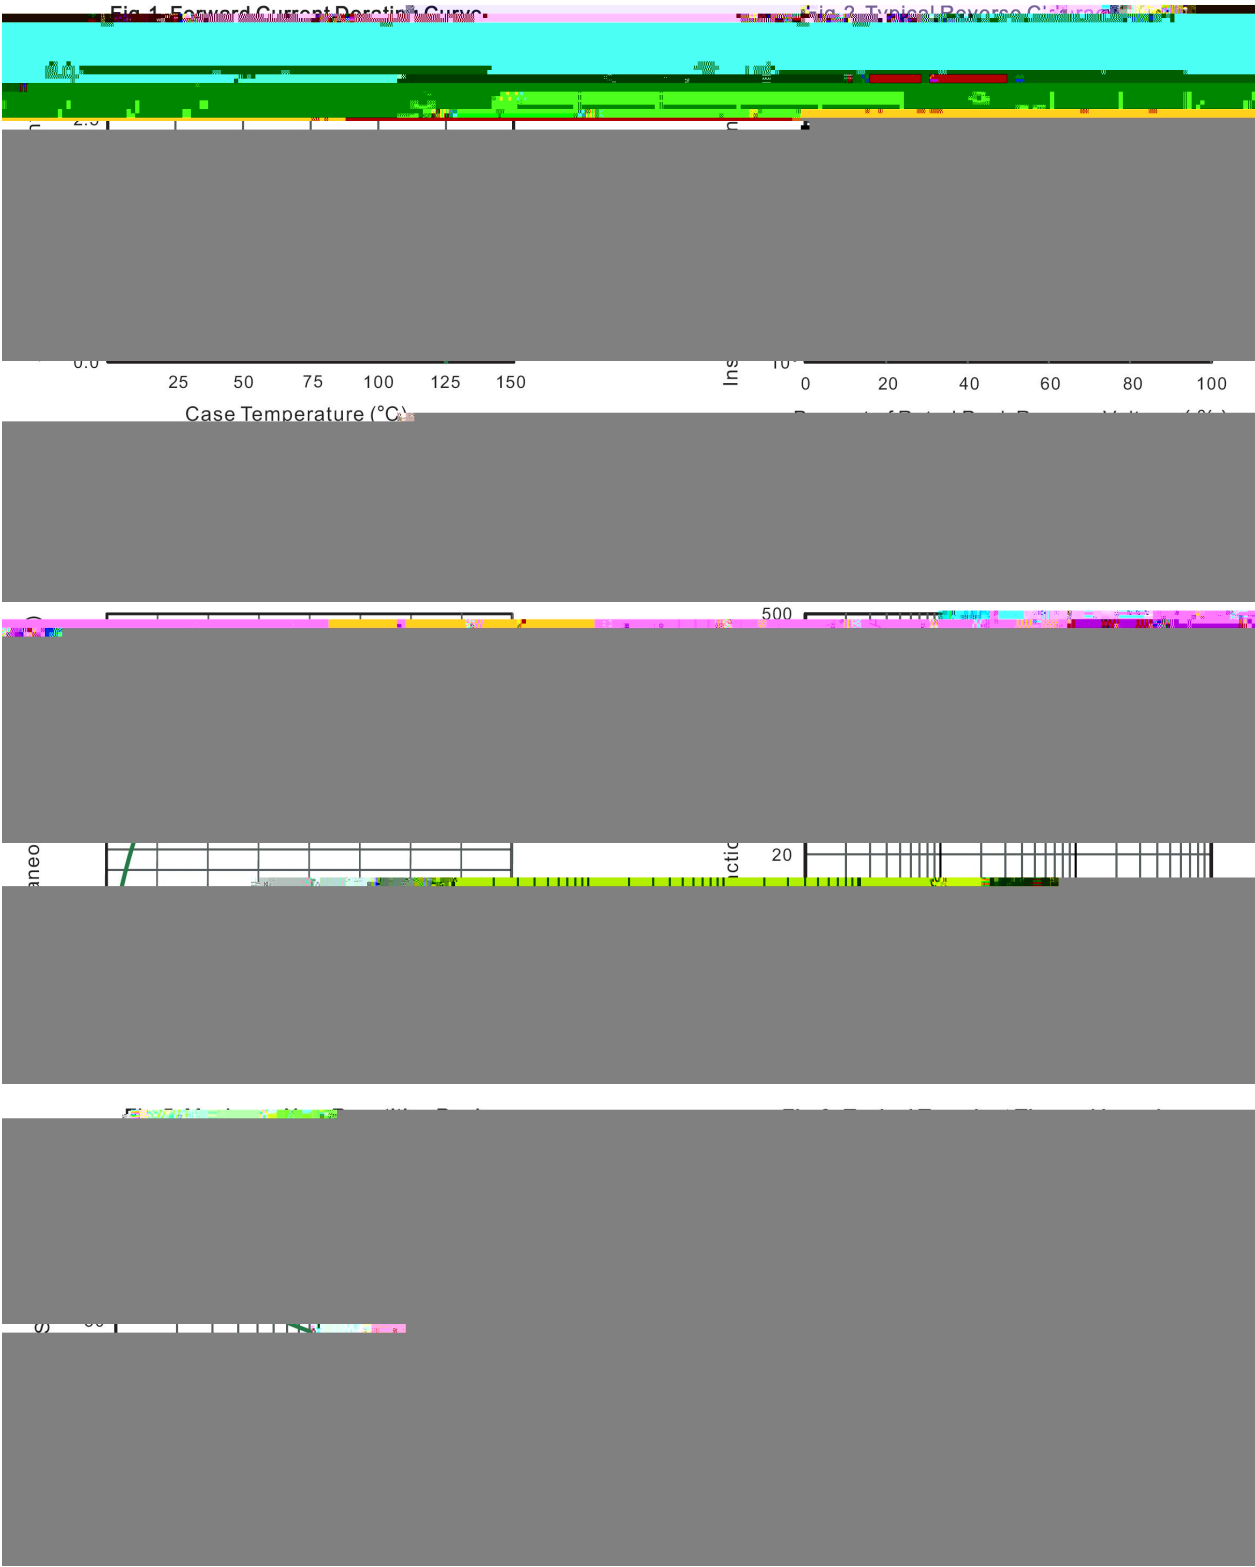

/ Marking Instructions

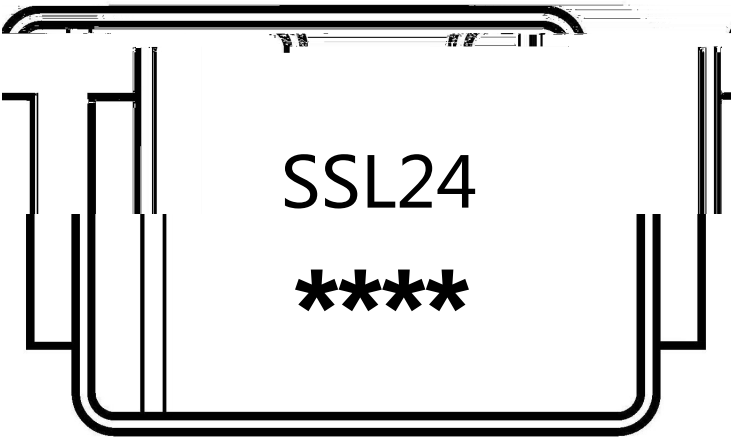

SSL24


1 *

3 *

SSL24

*

*



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±

°C

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

± °C

±

± °C

±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱