

/ Descriptions

60V 3.0A
: :

/ Features

/ Applications

.


/ Equivalent Circuit




/ Pinning




The recommended mounting pad size

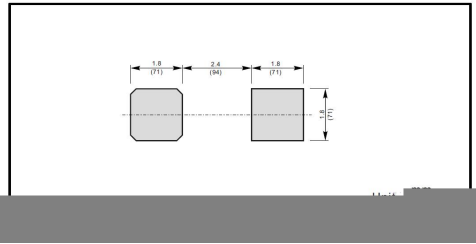



/ Marking



	()		
			°C
			°C
			°C




/ Package Dimensions

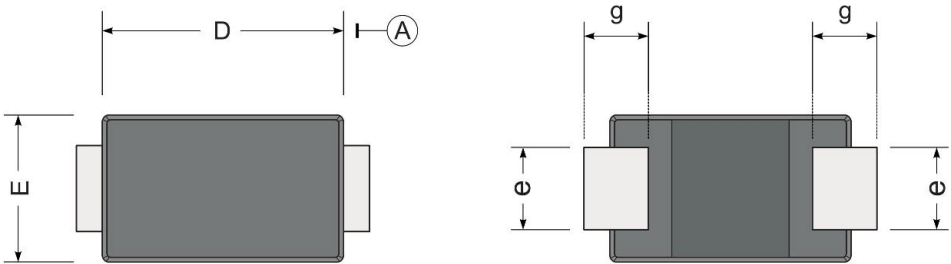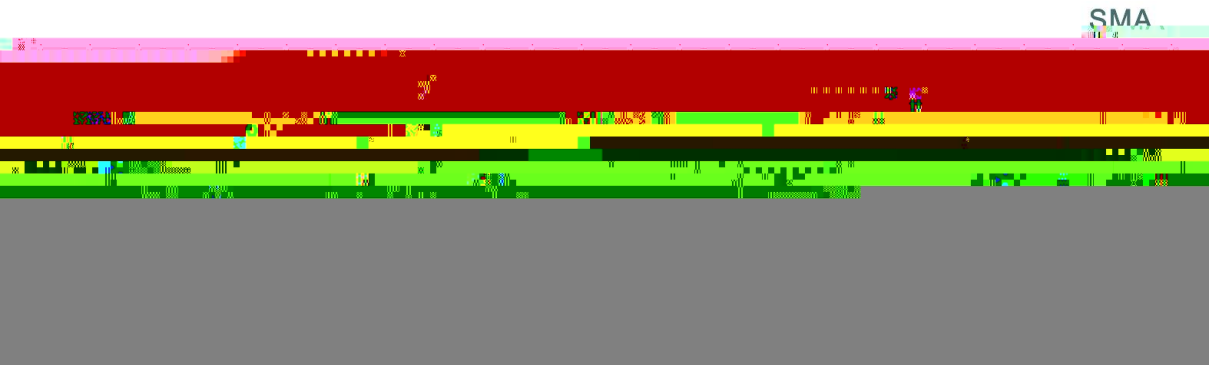


UNIT	A	D	E	H _E	c	c ₁	c ₂	b	c ₃

Marking





/ Marking Instructions

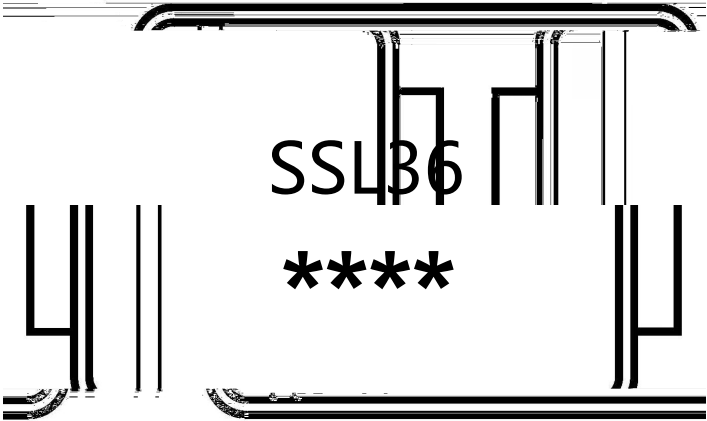

SSL36

1 *

3 *

SSL36

*

*


$$\pm \text{ }^{\circ}\text{C} \qquad \pm \qquad \pm \text{ }^{\circ}\text{C} \qquad \pm$$

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
						"		

7 7