

SSL56B~SSL510B



DATA SHEET

60V~100V

5.0A SMB




/ Absolute Maximum Ratings(Ta=25)

	()			
				℃
				℃

/ Electrical Characteristics(Ta=25)


			数值	
		℃		
		℃		

/ Electrical Characteristic Curve

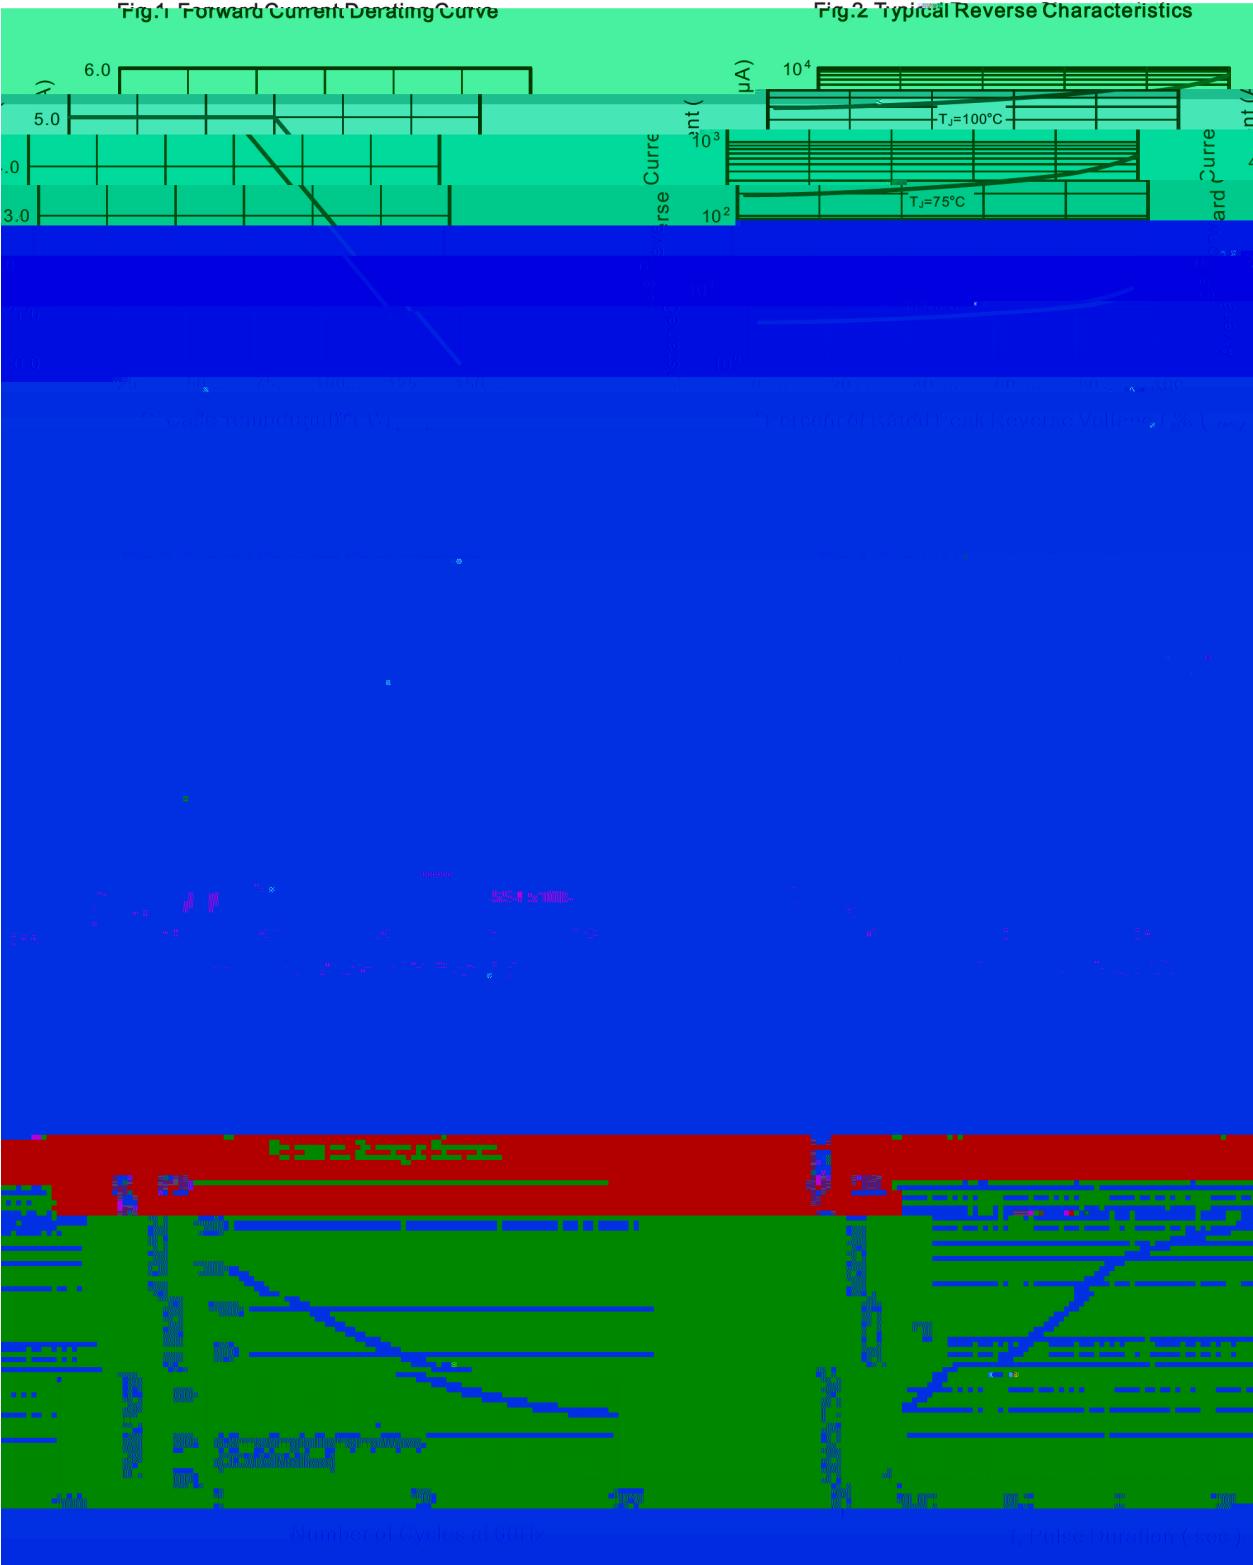

/ Package Dimensions

SMB

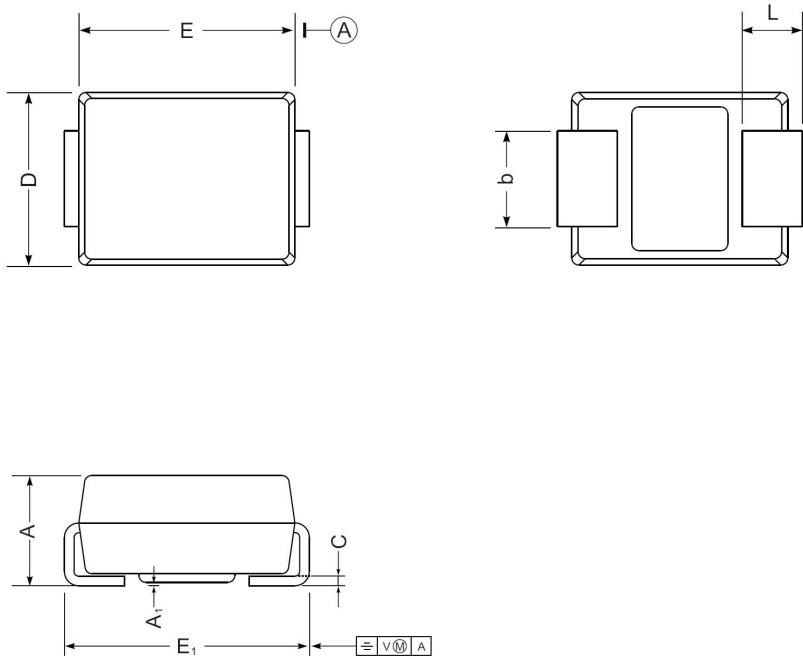


SMB mechanical data

UNIT		A	E	D	E ₁	A ₁	L	C	b
mm	max	2.44	4.70	3.94	5.59	0.20	1.53	0.305	2.22
	min	2.13	4.06	3.3	5.08	0.05	0.8	0.152	1.9
mil	max	96	185	155	220	7.9	59	12	87
	min	84	160	130	200	2.0	32	6	75

Marking

Type number	Marking code
SSL56B	SL56B
SSL510B	SL510B

/ Marking Instructions

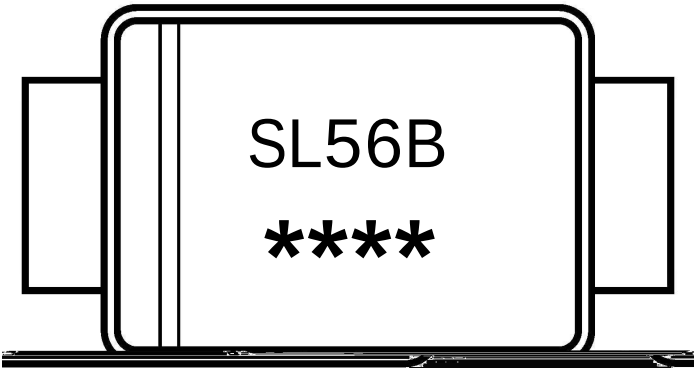

SL56B


1

3

SL56B

DATA SHEET

() /

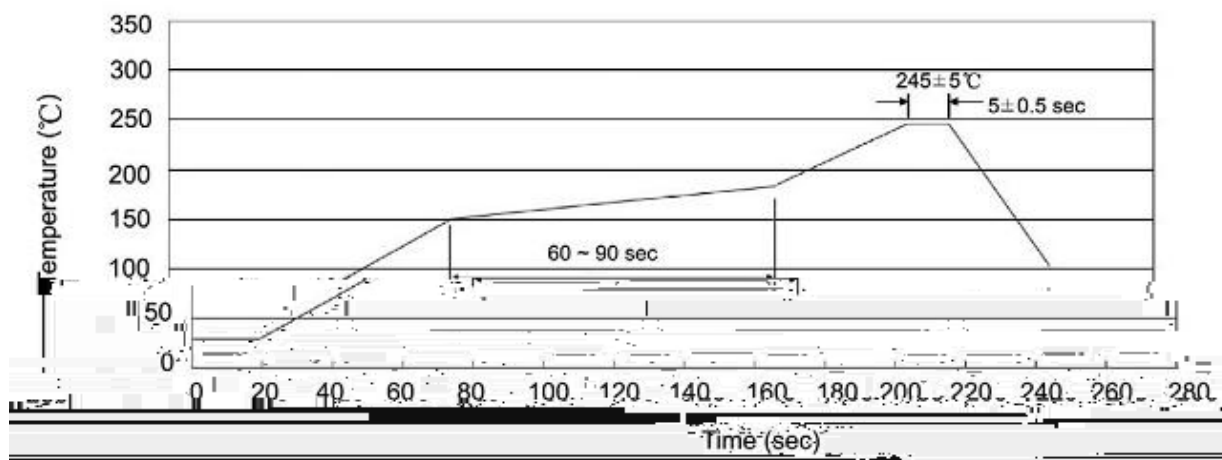
$$\frac{+}{-} \qquad \qquad \frac{+}{-} \qquad \qquad \qquad \frac{+}{-} \qquad \qquad \frac{+}{-}$$

/ Resistance to Soldering Heat Test Conditions

$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm$$

/ Packaging SPEC.

封装形式

包装数量
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

包装尺寸 :