




100V~1000V

1.2A



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

The recommended mounting pad size

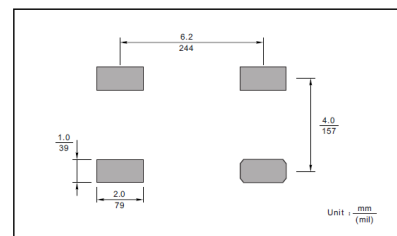

-

-

Fig.1 Average Rectified Output Current Derating Curve



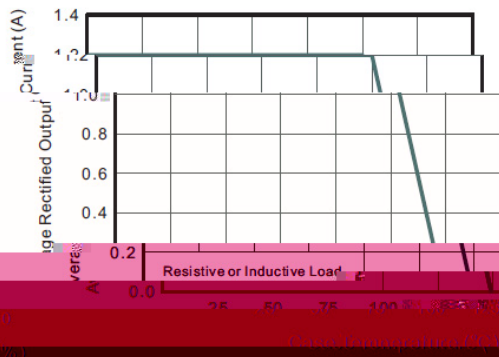



Fig.2 Typical Reverse Characteristics

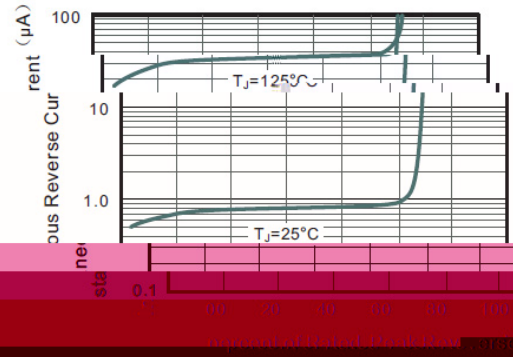


ABS/LBF

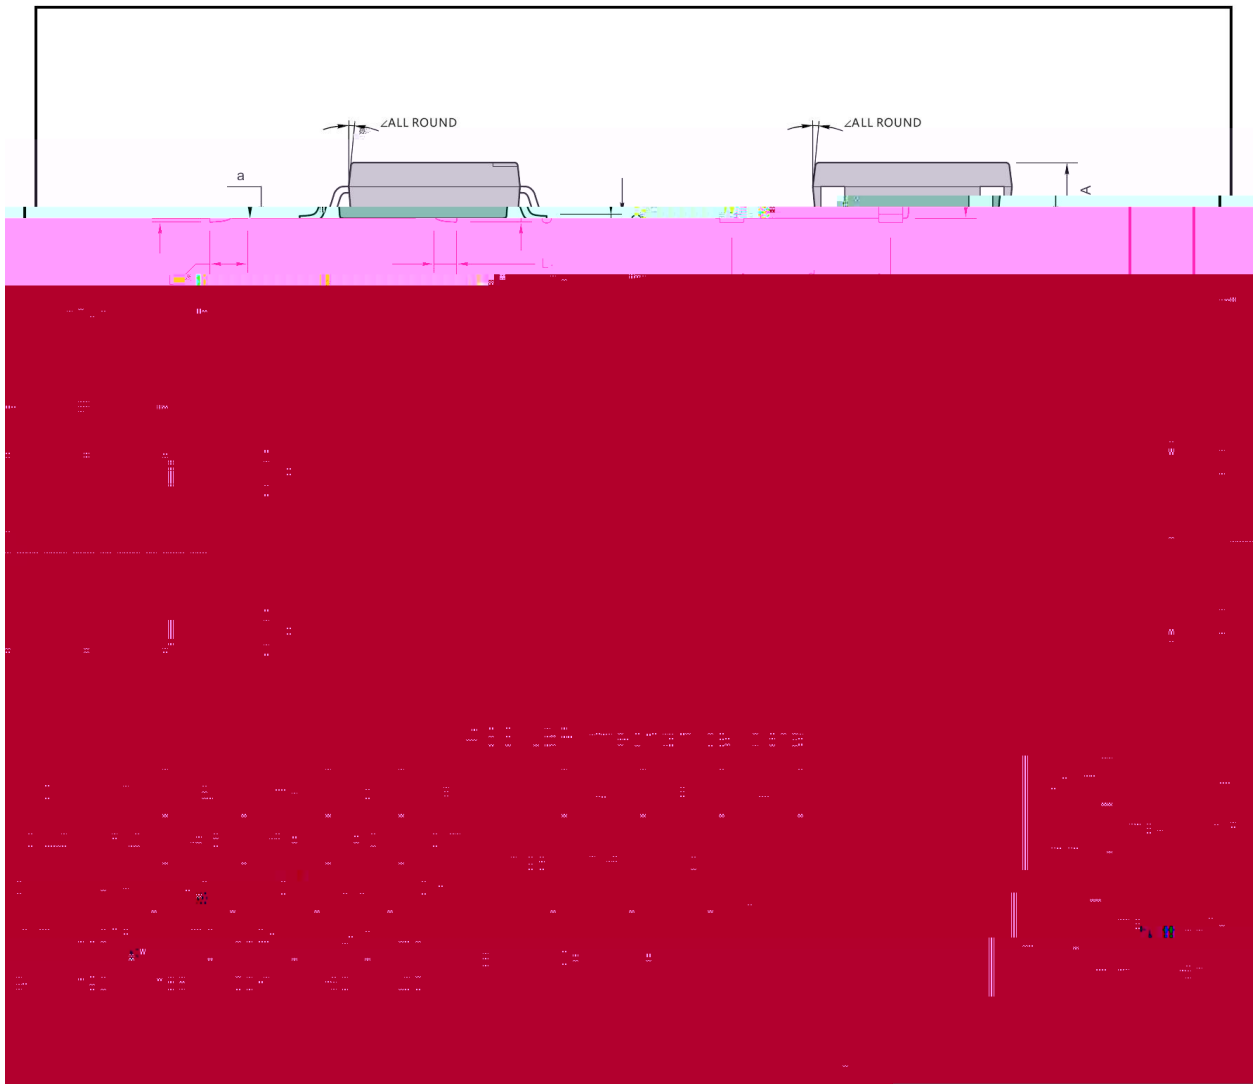


Marking

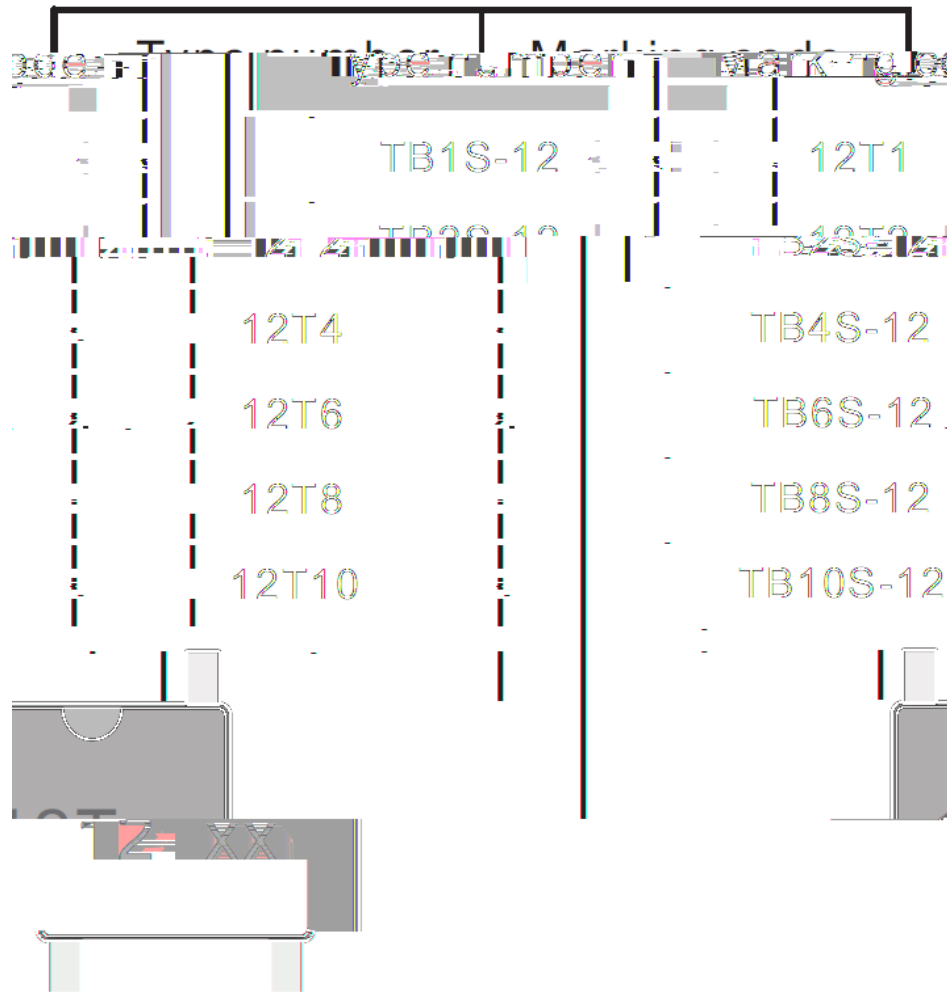

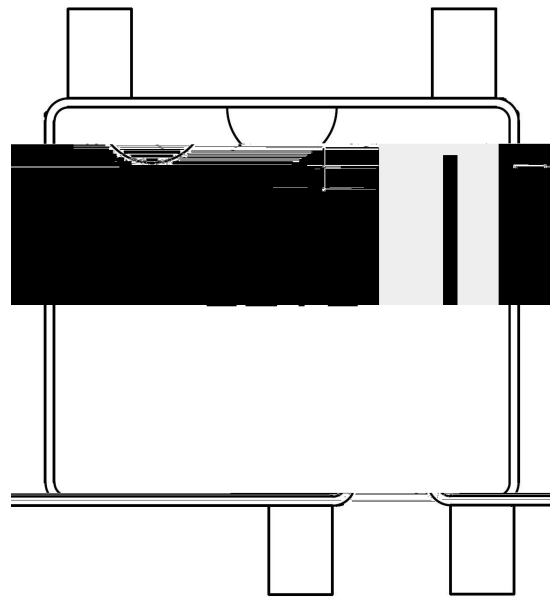

Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

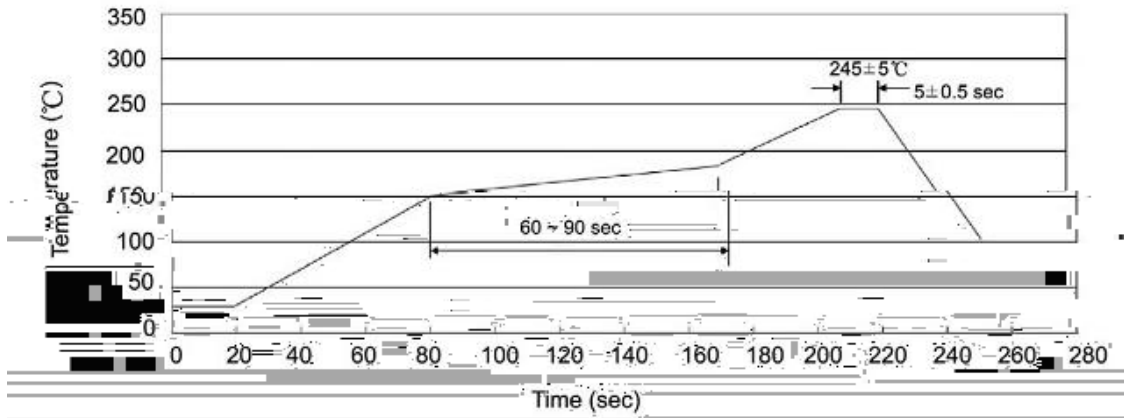

± ± ± ±

± ± ± ±

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
ABS/LBF								