

Rev.D May.-2017



1.0A

UMB

1.0A Surface Mount Glass Passivated Bridge Rectifier, UMB thin package.


Glass Passivated Chip Junction, High Surge Current Capability, Reverse Voltage :100 to 1000V, Forward Current:1.0A, Designed for Surface Mount Application. HF product.

General purpose.



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

The recommended mounting pad size

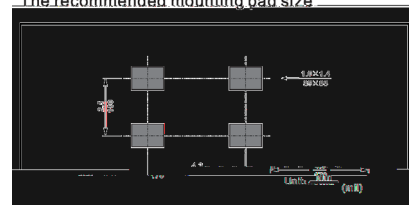


See Marking Instructions.

Parameter	Symbol	Rating						Unit
		UM1B-10	UM2B-10	UM4B-10	UM6B-10	UM8B-10	UM10B-10	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_a = 115$	I_o	1.0						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	35						A
Typical Junction Capacitance Note1	C_i	13						pF
Typical Thermal Resistance Note2	$R_{\theta JA}$ $R_{\theta JC}$	85 25						/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55~150						

Note:


1. Measured at 1MHz and applied reverse voltage of 4 V D.C.
2. P.C.B. mounted with 4x1.5 x1.5 (3.81x3.81cm) copper pad areas.

Parameter	Symbol	Test Conditions	Rating	Unit
Forward Voltage per element	V_F	$I_F=1.0A$	1.1	V
Maximum DC Reverse Current at Maximum DC Blocking Voltage	I_R	$T_a=25$	5.0	μA
		$T_a=125$	40	

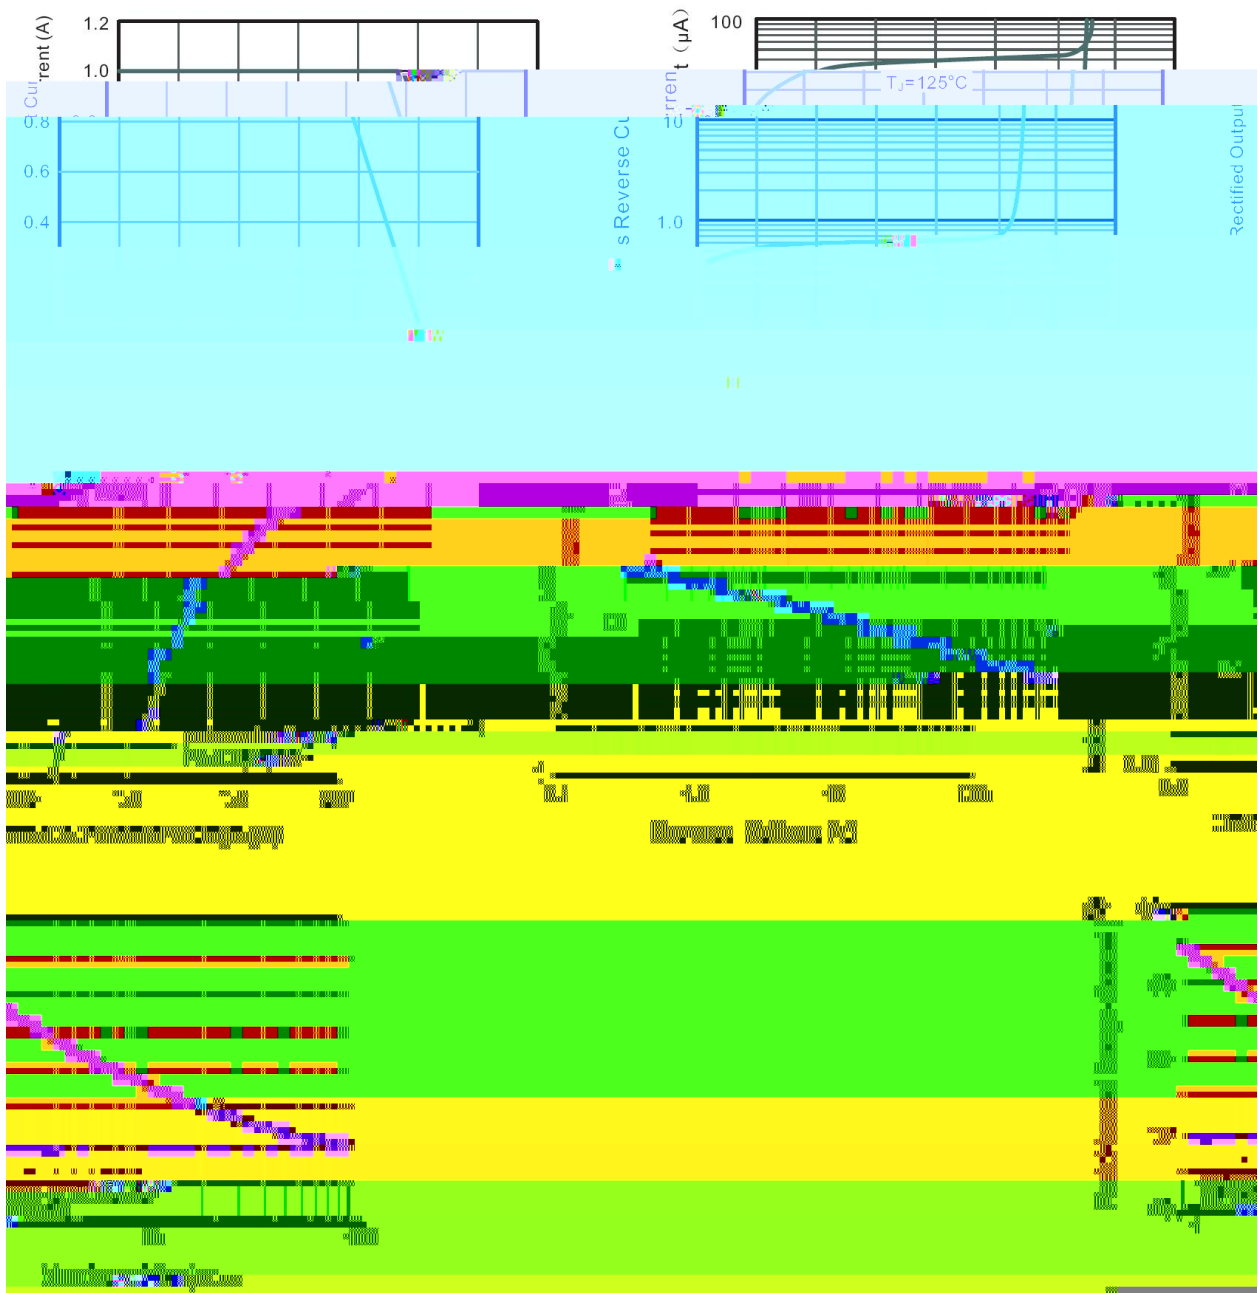

Marking

Type number	Marking code
UM1B-10	10U1
UM2B-10	10U2
UM4B-10	10U4
UM6B-10	10U6
UM8B-10	10U8
UM10B-10	10U10

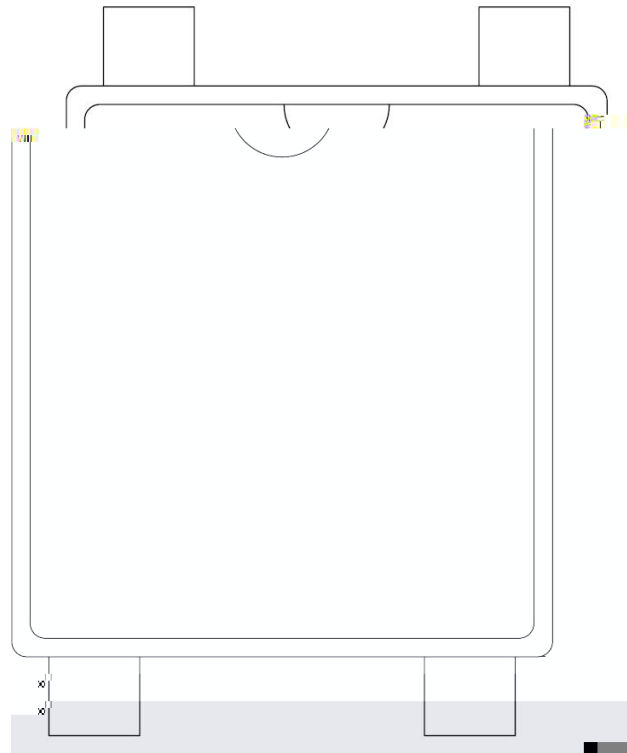

*

*


Note:

Product Type Code

Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot

No Code

Rev.D May.-2017

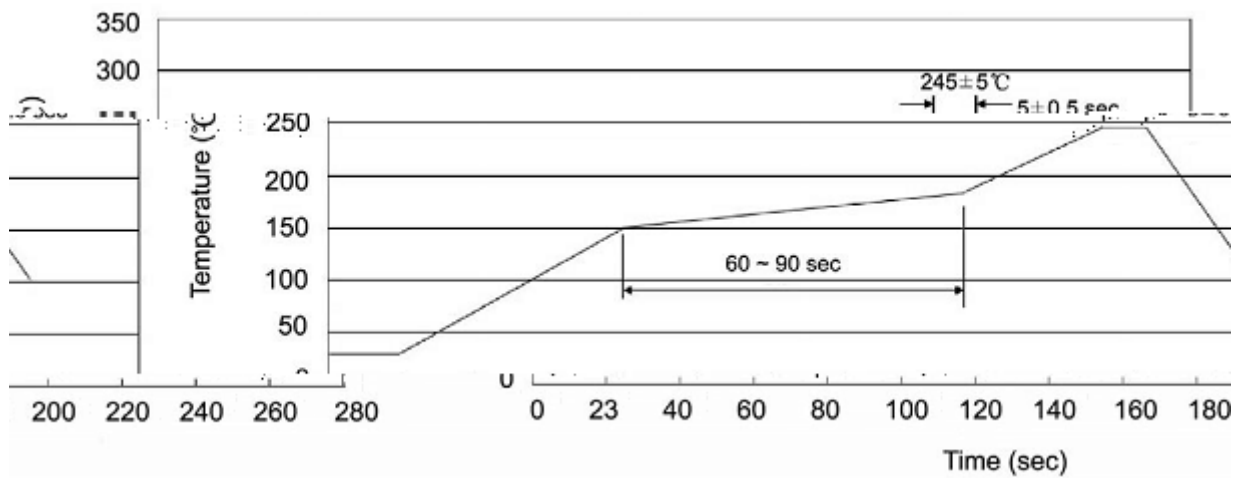Temperature Profile for IR Reflow Soldering(Pb-Free)


Note:

- | | | | | | |
|---|-----|-----|----|---------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260	5	10	1 sec.	Temp.:260±5	Time:10±1 sec
-----	---	----	--------	-------------	---------------

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
UMB	5000	2	10,000	5	50,000	13 16	340 × 340 × 40	350 × 350 × 230